


# Flush sills

## Flush sills in doorways (resilient)

Install flush sills in doorways.

Small steps and sills are often the cause of a small layer of water remaining inside of a house, complicating the clean-up process after a flood event. Limit the sills which obstruct the drainage and discharge of flood waters from the interior and install flush sills recessed into a concrete floor.

This is consistent with the principles set out in the Building Code of Australia.

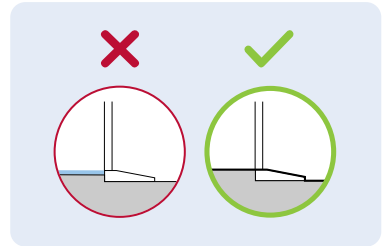

For more information on strengthening your home visit  
[getready.qld.gov.au/strengthen-your-home](https://getready.qld.gov.au/strengthen-your-home)

For flood information from your local council, visit  
[getready.qld.gov.au/find-your-local-council](https://getready.qld.gov.au/find-your-local-council)

*This assistance is made available through the jointly funded Commonwealth-State Disaster Recovery Funding Arrangements.*

